



Chapter 6

Randomization

Algorithm Theory
WS 2014/15

Fabian Kuhn

Randomized Quicksort

Quicksort:



function Quick (S : sequence): sequence;

{returns the sorted sequence S }

begin

if $\#S \leq 1$ then **return** S

else { choose pivot element v in S ;

 partition S into S_ℓ with elements $< v$,

 and S_r with elements $> v$

return

| | | |
|------------------------|-----|---------------------|
| $\text{Quick}(S_\ell)$ | v | $\text{Quick}(S_r)$ |
|------------------------|-----|---------------------|

end;

Alternative Analysis

Array to sort: [7 , 3 , 1 , 10 , 14 , 8 , 12 , 9 , 4 , 6 , 5 , 15 , 2 , 13 , 11]

Viewing quicksort run as a **tree:**

Comparisons

- Comparisons are only between pivot and non-pivot elements
- Every element can only be the pivot once:
 - every 2 elements can only be compared once!
- W.l.o.g., assume that the elements to sort are $1, 2, \dots, n$
- Elements i and j are compared if and only if either i or j is a pivot before any element $h: i < h < j$ is chosen as pivot
 - i.e., iff i is an ancestor of j or j is an ancestor of i

$$\mathbb{P}(\text{comparison betw. } i \text{ and } j) = \frac{2}{j - i + 1}$$

Counting Comparisons

Random variable for every pair of elements (i, j) :

$$X_{ij} = \begin{cases} 1, & \text{if there is a comparison between } i \text{ and } j \\ 0, & \text{otherwise} \end{cases}$$

Number of comparisons: X

$$X = \sum_{i < j} X_{ij}$$

- What is $\mathbb{E}[X]$?

Randomized Quicksort Analysis

Theorem: The expected number of comparisons when sorting n elements using randomized quicksort is $T(n) \leq 2n \ln n$.

Proof:

- **Linearity of expectation:**

For all random variables X_1, \dots, X_n and all $a_1, \dots, a_n \in \mathbb{R}$,

$$\mathbb{E} \left[\sum_i^n a_i X_i \right] = \sum_i^n a_i \mathbb{E}[X_i].$$

Randomized Quicksort Analysis

Theorem: The expected number of comparisons when sorting n elements using randomized quicksort is $T(n) \leq 2n \ln n$.

Proof:

$$\mathbb{E}[X] = 2 \sum_{i=1}^{n-1} \sum_{j=i+1}^n \frac{1}{j-i+1} = 2 \sum_{i=1}^{n-1} \sum_{k=2}^{n-i+1} \frac{1}{k}$$

Types of Randomized Algorithms

Las Vegas Algorithm:

- always a **correct solution**
- **running time** is a **random** variable

- **Example:** randomized quicksort, contention resolution

Monte Carlo Algorithm:

- **probabilistic correctness** guarantee (**m**ostly **c**orrect)
- fixed (deterministic) running time

- **Example:** primality test

Minimum Cut

Reminder: Given a graph $G = (V, E)$, a cut is a partition (A, B) of V such that $V = A \cup B$, $A \cap B = \emptyset$, $A, B \neq \emptyset$

Size of the cut (A, B) : # of edges crossing the cut

- For weighted graphs, total edge weight crossing the cut

Goal: Find a cut of minimal size (i.e., of size $\lambda(G)$)


Maximum-flow based algorithm:

- Fix s , compute min s - t -cut for all $t \neq s$
- $O(m \cdot \lambda(G)) = O(mn)$ per s - t cut
- Gives an $O(mn\lambda(G)) = O(mn^2)$ -algorithm

Best-known deterministic algorithm: $O(mn + n^2 \log n)$

Edge Contractions

- In the following, we consider multi-graphs that can have multiple edges (but no self-loops)

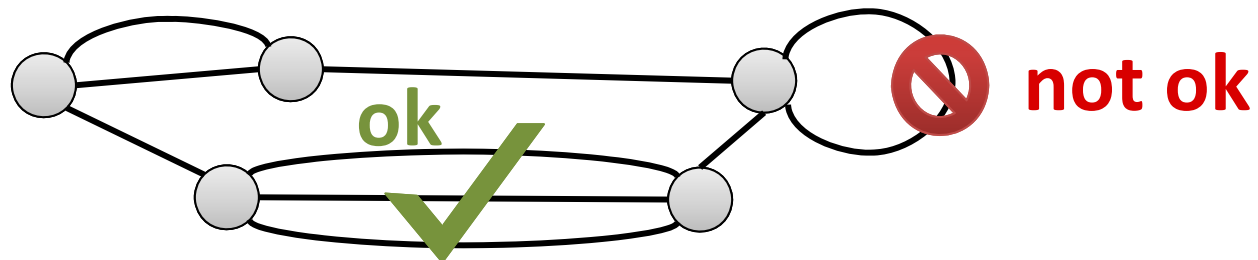

Contracting edge $\{u, v\}$:


- Replace nodes u, v by new node w
- For all edges $\{u, x\}$ and $\{v, x\}$, add an edge $\{w, x\}$
- Remove self-loops created at node w



Properties of Edge Contractions

Nodes:

- After contracting $\{u, v\}$, the new node represents u and v
- After a series of contractions, each node represents a subset of the original nodes

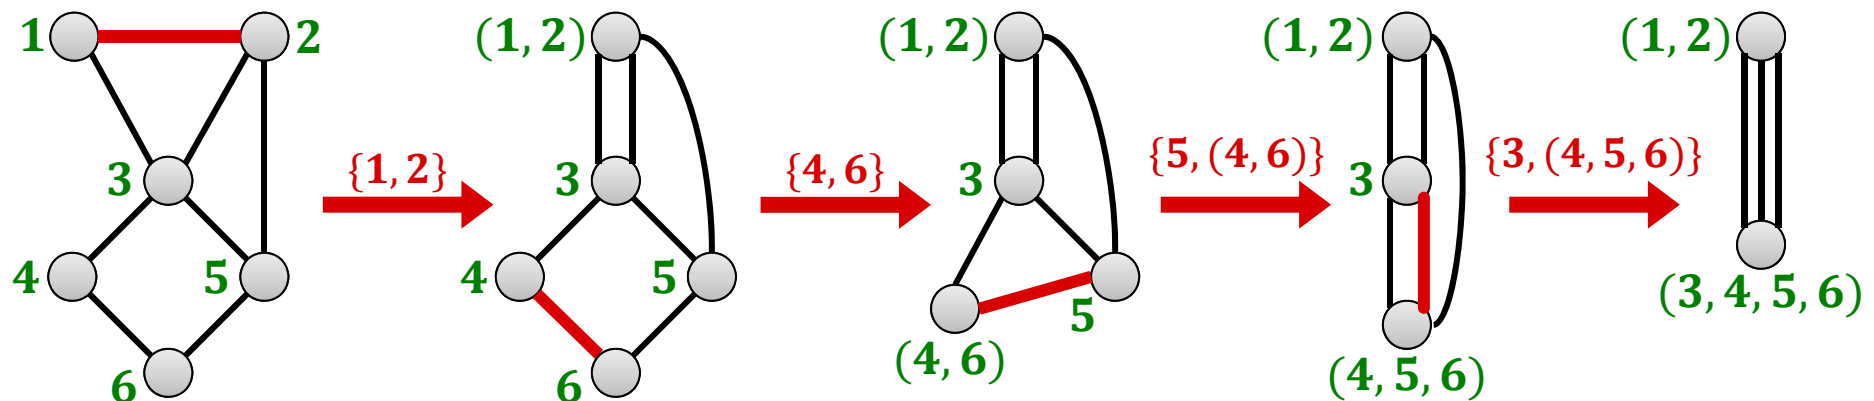

Cuts:

- Assume in the contracted graph, w represents nodes $S_w \subset V$
- The edges of a node w in a contracted graph are in a one-to-one correspondence with the edges crossing the cut $(S_w, V \setminus S_w)$

Randomized Contraction Algorithm



Algorithm:

while there are > 2 nodes **do**

 contract a uniformly random edge

return cut induced by the last two remaining nodes

(cut defined by the original node sets represented by the last 2 nodes)

Theorem: The random contraction algorithm returns a minimum cut with probability at least $1/O(n^2)$.

- We will show this next.

Theorem: The random contraction algorithm can be implemented in time $O(n^2)$.

- There are $n - 2$ contractions, each can be done in time $O(n)$.
- You will show this in the exercises.

Contractions and Cuts

Lemma: If two original nodes $u, v \in V$ are merged into the same node of the contracted graph, there is a path connecting u and v in the original graph s.t. all edges on the path are contracted.

Proof:

- Contracting an edge $\{x, y\}$ merges the node sets represented by x and y and does not change any of the other node sets.
- The claim follows by induction on the number of edge contractions.

Contractions and Cuts

Lemma: During the contraction algorithm, the edge connectivity (i.e., the size of the min. cut) cannot get smaller.

Proof:

- All cuts in a (partially) contracted graph correspond to cuts of the same size in the original graph G as follows:
 - For a node u of the contracted graph, let S_u be the set of original nodes that have been merged into u (the nodes that u represents)
 - Consider a cut (A, B) of the contracted graph
 - (A', B') with

$$A' := \bigcup_{u \in A} S_u, \quad B' := \bigcup_{v \in B} S_v$$

is a cut of G .

- The edges crossing cut (A, B) are in one-to-one correspondence with the edges crossing cut (A', B') .

Contraction and Cuts

Lemma: The contraction algorithm outputs a cut (A, B) of the input graph G if and only if it never contracts an edge crossing (A, B) .

Proof:

1. If an **edge crossing (A, B) is contracted**, a pair of nodes $u \in A$, $v \in V$ is merged into the same node and the algorithm **outputs** a cut **different from (A, B)** .
2. If **no edge of (A, B) is contracted**, no two nodes $u \in A$, $v \in B$ end up in the same contracted node because every path connecting u and v in G contains some edge crossing (A, B)

In the end there are only 2 sets \rightarrow **output is (A, B)**

Getting The Min Cut

Theorem: The probability that the algorithm outputs a minimum cut is at least $2/n(n-1)$.

To prove the theorem, we need the following claim:

Claim: If the minimum cut size of a multigraph G (no self-loops) is k , G has at least $kn/2$ edges.

Proof:

- Min cut has size $k \implies$ all nodes have degree $\geq k$
 - A node v of degree $< k$ gives a cut $(\{v\}, V \setminus \{v\})$ of size $< k$
- Number of edges $m = 1/2 \cdot \sum_v \deg(v)$

Getting The Min Cut

Theorem: The probability that the algorithm outputs a minimum cut is at least $2/n(n - 1)$.

Proof:

- Consider a fixed min cut (A, B) , assume (A, B) has size k
- The algorithm outputs (A, B) iff none of the k edges crossing (A, B) gets contracted.
- Before contraction i , there are $n + 1 - i$ nodes
→ and thus $\geq (n + 1 - i)k/2$ edges
- If no edge crossing (A, B) is contracted before, the probability to contract an edge crossing (A, B) in step i is at most

$$\frac{k}{\frac{(n + 1 - i)k}{2}} = \frac{2}{n + 1 - i}.$$

Getting The Min Cut

Theorem: The probability that the algorithm outputs a minimum cut is at least $2/n(n-1)$.

Proof:

- If no edge crossing (A, B) is contracted before, the probability to contract an edge crossing (A, B) in step i is at most $2/n_{+1-i}$.
- Event \mathcal{E}_i : edge contracted in step i is **not** crossing (A, B)

Getting The Min Cut

Theorem: The probability that the algorithm outputs a minimum cut is at least $2/n(n-1)$.

Proof:

- $\mathbb{P}(\mathcal{E}_{i+1} | \mathcal{E}_1 \cap \dots \cap \mathcal{E}_i) \geq 1 - \frac{2}{n-i} = \frac{n-2-i}{n-i}$
- No edge crossing (A, B) contracted: event $\mathcal{E} = \bigcap_{i=1}^{n-2} \mathcal{E}_i$

Randomized Min Cut Algorithm

Theorem: If the contraction algorithm is repeated $O(n^2 \log n)$ times, one of the $O(n^2 \log n)$ instances returns a min. cut w.h.p.

Proof:

- Probability to not get a minimum cut in $c \cdot \binom{n}{2} \cdot \ln n$ iterations:

$$\left(1 - \frac{1}{\binom{n}{2}}\right)^{c \cdot \binom{n}{2} \cdot \ln n} < e^{-c \ln n} = \frac{1}{n^c}$$

Corollary: The contraction algorithm allows to compute a minimum cut in $O(n^4 \log n)$ time w.h.p.

- Each instance can be implemented in $O(n^2)$ time.
($O(n)$ time per contraction)

Can We Do Better?

- Time $O(n^4 \log n)$ is not very spectacular, a simple max flow based implementation has time $O(n^4)$.

However, we will see that the contraction algorithm is nevertheless very interesting because:

1. The algorithm can be improved to beat every known deterministic algorithm.
2. It allows to obtain strong statements about the distribution of cuts in graphs.

Better Randomized Algorithm

Recall:

- Consider a fixed min cut (A, B) , assume (A, B) has size k
- The algorithm outputs (A, B) iff none of the k edges crossing (A, B) gets contracted.
- Throughout the algorithm, the edge connectivity is at least k and therefore each node has degree $\geq k$
- Before contraction i , there are $n + 1 - i$ nodes and thus at least $(n + 1 - i)k/2$ edges
- If no edge crossing (A, B) is contracted before, the probability to contract an edge crossing (A, B) in step i is at most

$$\frac{k}{\frac{(n + 1 - i)k}{2}} = \frac{2}{n + 1 - i}$$

Improving the Contraction Algorithm

- For a specific min cut (A, B) , if (A, B) survives the first i contractions,

$$\mathbb{P}(\text{edge crossing } (A, B) \text{ in contraction } i + 1) \leq \frac{2}{n - i}.$$

- **Observation:** The probability only gets large for large i
- **Idea:** The early steps are much safer than the late steps.
Maybe we can repeat the late steps more often than the early ones.

Safe Contraction Phase

Lemma: A given min cut (A, B) of an n -node graph G survives the first $n - \left\lceil \frac{n}{\sqrt{2}} + 1 \right\rceil$ contractions, with probability $> 1/2$.

Proof:

- Event \mathcal{E}_i : cut (A, B) survives contraction i
- Probability that (A, B) survives the first $n - t$ contractions:

Better Randomized Algorithm

Let's simplify a bit:

- Pretend that $n/\sqrt{2}$ is an integer (for all n we will need it).
- Assume that a given min cut survives the first $n - n/\sqrt{2}$ contractions with probability $\geq 1/2$.

contract(G, t):

- Starting with n -node graph G , perform $n - t$ edge contractions such that the new graph has t nodes.

mincut(G):

1. $X_1 := \text{mincut}(\text{contract}(G, n/\sqrt{2}));$
2. $X_2 := \text{mincut}(\text{contract}(G, n/\sqrt{2}));$
3. **return** $\min\{X_1, X_2\};$

Success Probability

mincut(G):

1. $X_1 := \text{mincut}(\text{contract}(G, n/\sqrt{2}));$
2. $X_2 := \text{mincut}(\text{contract}(G, n/\sqrt{2}));$
3. **return** $\min\{X_1, X_2\};$

$P(n)$: probability that the above algorithm returns a min cut when applied to a graph with n nodes.

- Probability that X_1 is a min cut \geq

Recursion:

Success Probability

Theorem: The recursive randomized min cut algorithm returns a minimum cut with **probability at least $1/\log_2 n$** .

Proof (by induction on n):

$$P(n) = P\left(\frac{n}{\sqrt{2}}\right) - \frac{1}{4} \cdot P\left(\frac{n}{\sqrt{2}}\right)^2, \quad P(2) = 1$$